


100% solids, semi-rigid epoxy control joint filler

SPECPOXY CJ is two component, semi-rigid epoxy for filling control and construction joints in industrial concrete floors. This product supports the joint edges and reduces spalling of the edges caused by wheel traffic. SPECPOXY CJ has been designed for use in compliance with ACI 302, section 4.10 recommendations for epoxy joint fillers used in sawcut/control joints.

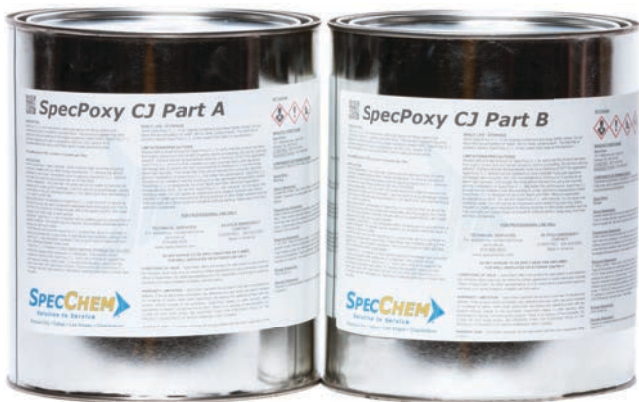

✓ Benefits

- Easy 1 to 1 mix ratio/Pourable gray consistency
- High elongation to resist tearing due to excessive movement
- Moisture insensitive to cure in damp environments
- Semi-rigid flexibility that does not weld slabs together or become brittle with age
- Optimum hardness to transfer wheel loads while allowing moderate movement



Usage

- Contraction/construction joints that are cut or formed
- Repair of damaged or spalled joint nosing and cracks



Packaging

- 2 gallons (11.36 L)
- 10 gallons (56.78 L)