


## Premium self-leveling underlayment

SpecFlow is a cement-based, self-leveling floor underlayment designed for interior applications. This high-quality, non-shrinking product ensures a smooth subfloor that is feather-edged compatible, preparing surfaces for carpet, tile adhesives, and other finishes. Simple to use, SpecFlow requires only mixing with water to achieve a smooth, flat, and hard surface.

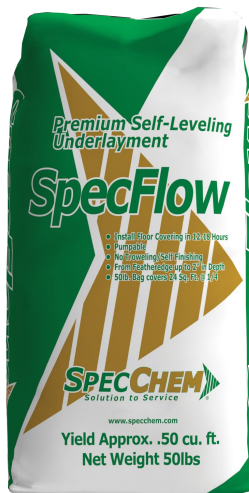

### ✓ Benefits

- SpecFlow produces a flowable underlayment with a flow time of 20 minutes at 70°F, requiring no troweling and enabling easy application.
- It can be featheredged, offering flexibility in application thickness from a feather edge up to 2 inches, and up to 5 inches with pea gravel extension.
- The product creates a smooth, blemish-free surface, eliminating the need for grinding or sanding.
- It's compatible with a variety of flooring adhesives, making it suitable for subsequent floor covering installations.

## Premium self-leveling underlayment



### Usage

- **Interior Floor Leveling:** Ideal for leveling and smoothing rough, unfinished, or uneven interior floors in residential, commercial, and industrial settings.
- **New Construction and Renovations:** Perfect for preparing subfloors in new construction projects or for correcting existing floors in renovation projects.
- **Substrate Versatility:** Suitable for use over concrete, wood, and other subfloor materials. Proper surface preparation and priming with SpecPrime are essential for optimal adhesion and performance.



### Packaging

- 50 lb. bags



SCAN QR CODE  
FOR MORE INFO