

PRO PLUG 45



Rapid Setting Cement Based Hydraulic Cement

DESCRIPTION

PRO PLUG 45 is a hydraulic cement formula designed to set at three (3) times the speed of ordinary quick set plug. Instant setting can be achieved in 45 seconds to stop pressure leaks in concrete and masonry surfaces. This rapid set allows PRO PLUG 45 to bond mechanically and chemically to saturate surfaces.

- Stops Streaming Leaks in Concrete
- Anchors Bolts and Rods
- Seals Cracks and Floor and Wall Junctions

FEATURES/BENEFITS

- Non-Metallic, Non Rusting
- Fast Setting
- Stops water leaks under pressure
- Easy to mix
- Single component
- Expands as it sets
- Waterproof
- Chloride and metal free mortar
- Can be shaved and molded to desired contour
- Once set, Pro Plug 45 is resistant to hydrostatic pressure

APPLICATION

Substrate Preparation: Slightly undercut the hole to be plugged and enlarge small cracks to permit embedment of material. Recommended minimum size of hole or crack is 0.75 in. wide and deep. Remove all loose dirt or aggregate. Surfaces should be SSD (Saturated Surface Dry) prior to placement.

MIXING:

Mix PRO PLUG 45 with clean potable water. Add just enough to make a putty consistency. Water ratio is 3 parts powder to 1 part water. PRO PLUG 45 is to be mixed in small quantities only due to rapid set time.

APPLICATION:

Apply PRO PLUG 45 with trowel or by hand to seeping area starting at top of crack. Hold firmly in place exerting pressure with hand or trowel for about 3 minutes to be sure PRO PLUG 45 does not wash out under water pressure. If small leaks should appear around the patched area, sprinkle PRO PLUG 45 in a dry form onto the leaking area, or mix a small batch of PRO PLUG 45 to a soft putty consistency and hold firmly over area till set.

STOP STREAMING WATER: Begin at top of crack and place PRO PLUG 45 in firmly using some force to place into opening. Continue to apply pressure with trowel or by hand until material sets and active water has stopped.

APPLICATION CONT.

SEALING CRACKS, FLOOR /WALL JUNCTIONS: Firmly push PRO PLUG 45 into crack or hole to form a cove at the floor and wall junction.

ANCHORING BOLTS OR RODS: Drill or chisel a hole deep enough to hold bolt or rod securely and a large enough opening, 1/2" space on all sides of bolt or rod. Position the bolt in the hole, use a small pointed trowel and fill in PRO PLUG 45 completely around bolt. Smooth off surface with trowel while supporting bolt with hand for about one minute until it does not sag.

APPLICATION NOTES:

1. It is the responsibility of the contractor to review the complete technical datasheets of CGM products referenced above as more detailed information may be required. The information provided above acts only as a general guideline and may vary based on jobsite conditions.
2. Apply PRO PLUG 45 immediately after mixing.
3. Not for use in moving cracks.
4. Not for use as a surface applied material or coating.
5. Maintain minimum application widths and depths.
6. Wet substrate prior to placement keeping the material wet for a minimum of 15 minutes

TYPICAL TEST DATA

Compressive Strength (ASTM C109)	
4 hours	2000 psi
1 day	4000 psi
28 days	5500 psi

STORAGE

Store in cool dry place. Tightly seal package and do not exposure to sun.

PACKAGING

50 lb pail

SHELF LIFE

12 Months



1511 Baltimore Ave, Suite 600
Kansas City, MO 64108

www.specchemllc.com 866.791.8700

WARRANTY

NOTICE-READ CAREFULLY

CONDITIONS OF SALE


SpecChem offers this product for sale subject to and limited by the warranty which may only be varied by written agreement of a duly authorized corporate officer of SpecChem. No other representative of or for SpecChem is authorized to grant any warranty or to waive limitation of liability set forth below.

WARRANTY LIMITATION

SpecChem warrants this product to be free of manufacturing defects. If the product when purchased was defective and was within use period indicated on container or carton, when used, SpecChem will replace the defective product with new product without charge to the purchaser. SpecChem makes no other warranty, either expressed or implied, concerning this product. There is no warranty of merchantability. NO CLAIM OF ANY KIND SHALL BE GREATER THAN THE PURCHASE PRICE OF THE PRODUCT IN RESPECT OF WHICH DAMAGES ARE CLAIMED.

INHERENT RISK

Purchaser assumes all risk associated with the use or application of the product.

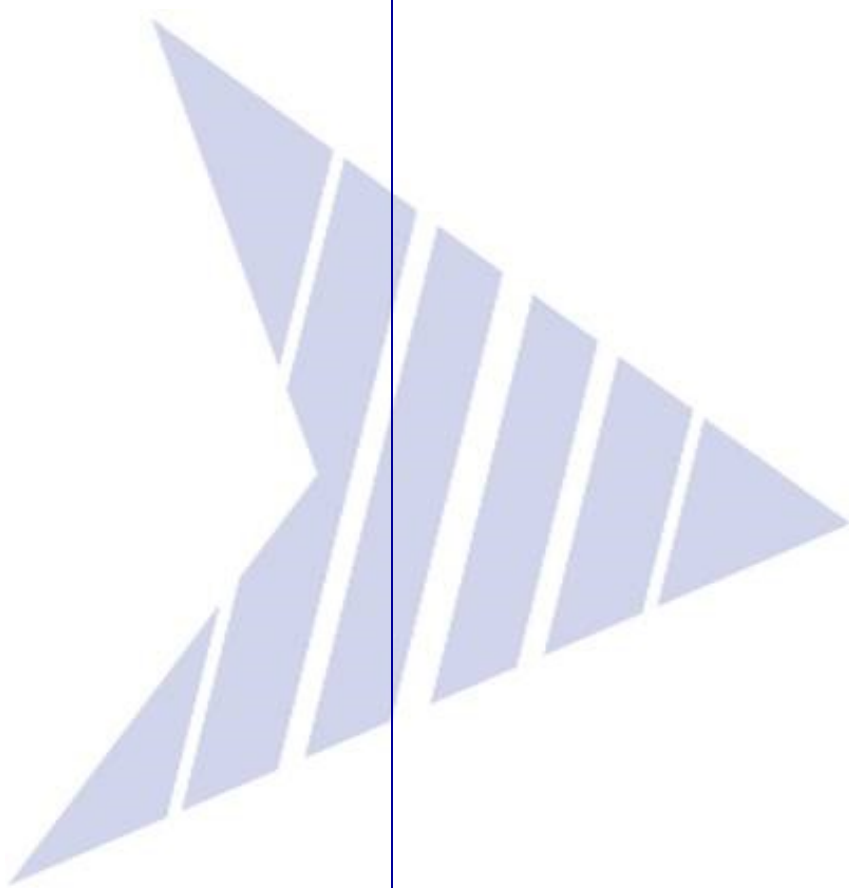

1511 Baltimore Ave, Suite 600
Kansas City, MO 64108
www.specchemllc.com 866.791.8700