


Premium self-leveling underlayment

Sleek 1000 SLU is a cement-based, non-shrinking, self-leveling floor underlayment designed for interior use. This single-component product produces a smooth subfloor that can be feather edged and is compatible with adhesives for carpet and tile. Just mix Sleek 1000 SLU with water, pour or pump, and it will seek its own level to produce a smooth, flat hard surface.

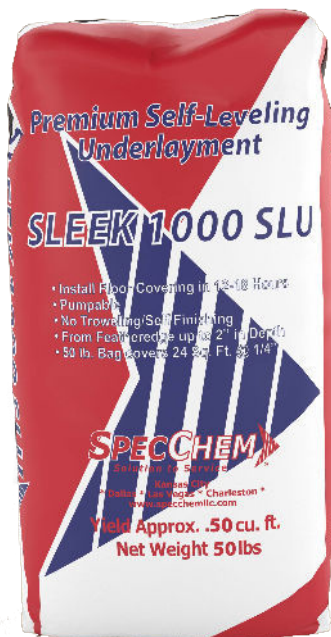

✓ Benefits

- Can be pumped
- Self-leveling, requiring no troweling
- Can be featheredged without fear of chipping or spalling.
- Is compatible with subsequent adhesives for carpet, tile and the like.
- Produces a smooth, blemish-free surface, requiring no grinding or sanding
- Sleek 1000 SLU, when properly mixed, produces a flowable underlayment with a flow time of 20 minutes at 70°F.



Usage

- Sleek 1000 SLU can be used to level or smooth interior floors
- Can be applied over wood floors
- Can be used on new construction projects to correct rough, unfinished, or uneven floors.

Packaging

- Available in 50 lb. bags. 1 bag covers approximately 24 sq/ft at 1/4"

TYPICAL TEST DATA			
Set Time at 70 °F (ASTM C-266)		Bond Strength (ASTM C-882 modified)	
Initial Set	40 Minutes	14 Days w/ SpecPrime	1000 PSI
Final Set	70 Minutes	Flexural Strength (ASTM C-348)	
Compressive Strength (ASTM C-109)		28 Days	1150 PSI
1 Day	2800 PSI	Yield/Density	
7 Days	4000 PSI	Yield Per Bag	.50 cu-ft (125 lbs/cu-ft)
28 Days	5000 PSI		